

# HOTflow® Engine Heaters

## CTM Model Single Phase

1000–2500 Watts



Meets requirements for installation on any UL 2200 listed generator.

## Isolation Mounting Kit (optional)

CTM-IMK


HOTSTART's HOTflow® engine heater (CTM Model) features an integrated pump that combines the benefits of forced circulation with a compact design that can mount to a variety of small engine applications. Forced circulation of the coolant delivers uniform heating throughout the entire engine, extends element life and offers a significant reduction in electrical consumption.

Thermostat Range	
ON	OFF
100°F (38°C)	120°F (49°C)

Engine Displacement CID/Liter	Power Supply			kW	Amps	Model Number
	Volts	Ø	Hz			
<b>CTM w/8' (2.4 m) cord and NEMA plug*</b>						
<b>0–500 CID 0–8 L</b>	120	1	60	1	8.8	CTM10110-N00 CTM10210-N00
	240	1	50/60	1	4.4	
<b>500–750 CID 8–12 L</b>	120	1	60	1.5	13.0	CTM15110-N00 CTM15210-N00
	240	1	50/60	1.5	6.5	
<b>750–1200 CID 12–20 L</b>	120	1	60	2.5	21.3	CTM25110-N00 CTM25210-N00
	240	1	50/60	2.5	10.7	
<b>CTM w/9.8' (3 m) cord, without plug</b>						
<b>0–500 CID 0–8 L</b>	120	1	60	1	8.8	CTM10110-A00 CTM10210-A00
	240	1	50/60	1	4.4	
<b>500–750 CID 8–12 L</b>	120	1	60	1.5	13.0	CTM15110-A00 CTM15210-A00
	240	1	50/60	1.5	6.5	
<b>750–1200 CID 12–20 L</b>	120	1	60	2.5	21.3	CTM25110-A00 CTM25210-A00
	240	1	50/60	2.5	10.7	
<b>CTM w/6.6' (2 m) cord and Schuko plug (Euro)**</b>						
<b>0–500 CID 0–8 L</b>	240	1	50/60	1	4.4	CTM10210-E00
<b>500–750 CID 8–12 L</b>	240	1	50/60	1.5	6.5	CTM15210-E00
<b>750–1200 CID 12–20 L</b>	240	1	50/60	2.5	10.7	CTM25210-E00

\* - UL/C-US listed  
\*\* - CE compliant

Other voltages available. Consult the factory.

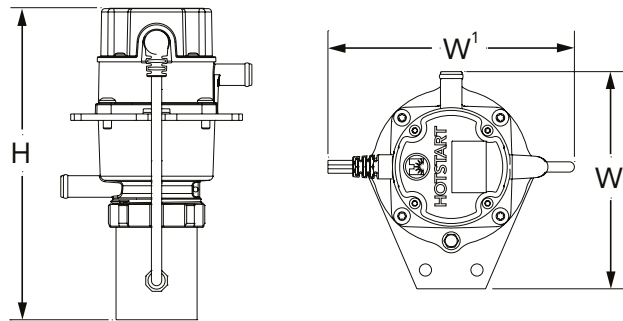

Height (H)	Width1 (W <sup>1</sup> )	Width2 (W <sup>2</sup> )	Weight
9.1" 230mm	7.0" 145mm	6.3" 161mm	3.5 lbs. 1.6 kg

